

This  
is **Light  
& Frame.**

TEXTILE COVERS



## TREVISION



### Textile covers with profile.

Inputs from the international market and continuous product development in the area of "Light, Frame and Print" ensure that we can respond immediately to changing requirements and offer suitable product solutions with profile. In addition to the continuous further development of our versatile profiles, we also offer corresponding accessory products and intelligent overall solutions in the area of "Light, Frame and Print". Expert advice on our profiles, flexible service and fast delivery are the hallmarks of Trevision.

The production of the products developed in Austria takes place under strictest quality conditions within the EU. Thus, we ensure consistently high quality in all our profiles for your unprecedented visual communication indoors and outdoors, in trade fair and store construction, store design and architecture. Our profile systems offer a high degree of flexibility and ensure quick interchangeability of subjects.

The principle of project solutions with textile covering is very simple. A silicone welt is sewn all around the individual fabric prints. The prints are simply pressed into the profile and can be changed quickly and easily. Thanks to the frameless look of our systems, the motif is the center of attention, without any disturbing fastening techniques.





©ONE TWO **FRAME**


# SF Adapter Frame

## Basic information

**Dimensions** 6100 x 31 x 9 mm  
**Weight** 280 g/rmt

## Description

For shopfitting or converting existing frame systems to flat rebate systems. This profile cannot be reinforced. The SF adapter profile is mainly installed on objects where no other profiles can be used due to the circumstances.

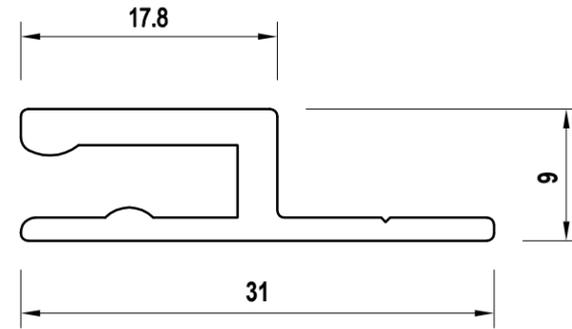


## FEATURES




Lighting not possible



Shipping in tube



For single sided application

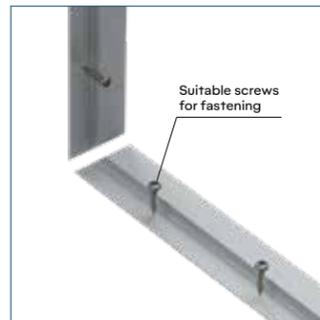

# matching accessories

--


# SF 17 Frame

## Basic information


**Dimensions** 6100 x 17 x 21 mm  
**Weight** 363 g/rmt

## Description

Narrow profile for smaller formats. Preferably for wall mounting. No reinforcement possible.

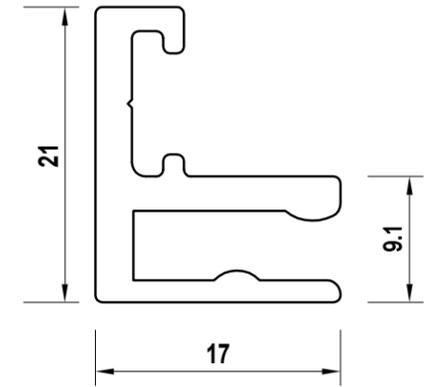

## FEATURES



For single sided application



Shipping in tube



Lighting not possible



# matching accessories

ZR 005 - SF CORNER CONNECTOR STEEL S

SF ADAPTER  
FRAME

SF 17  
FRAME


# SF 23 Frame

## Basic information

**Dimensions** 6100 x 23 x 40 mm  
**Weight** 700 g/rmt

## Description

Stable profile with high inherent strength. Preferably for wall mounting. Reinforcement possible.

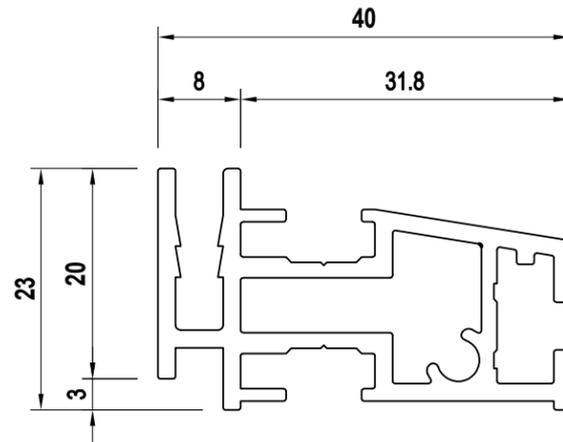


# SF 55 DS Frame

## Basic information

**Dimensions** 6100 x 55 x 29 mm  
**Weight** 1038 g/rmt

## Description

Double-sided profile for use as a screen, ceiling hanger, etc. Sound insulation panels up to 40 mm thick can be used. Reinforcement possible.

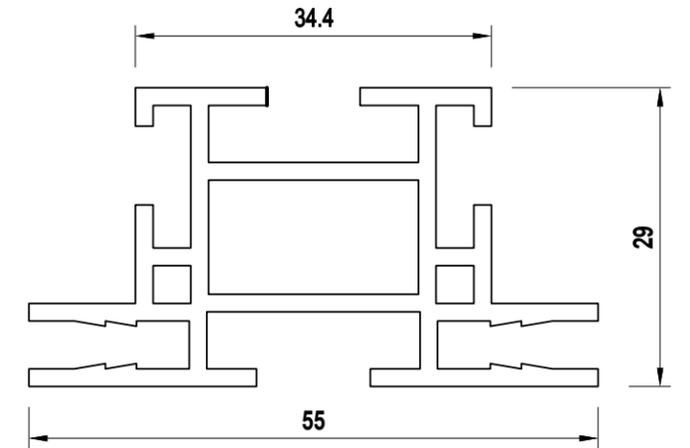


## FEATURES





Lighting not possible



Shipping in tube



For single sided application

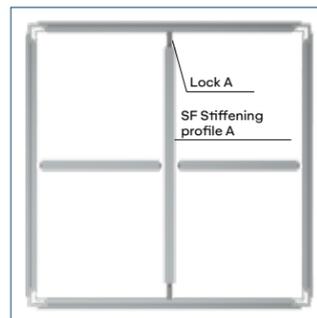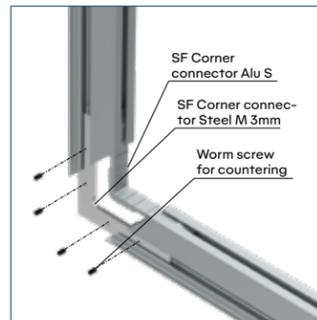


## # matching accessories


**ZR 001** - SF CORNER CONNECTOR ALU S // **ZR 007** - SF CORNER CONNECTOR STEEL M 3mm // **ZR 008** - CONNECTOR STRAIGHT STEEL // **ZR 009** - SF STIFFENING PROFILE A // **ZR 010** - LOCK A



## FEATURES



For single sided application





For double sided application



Shipping in tube



Lighting not possible

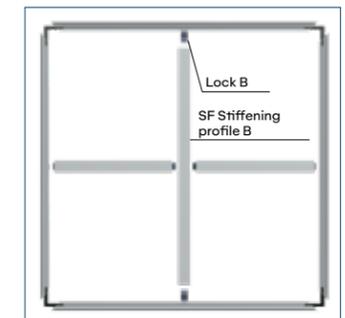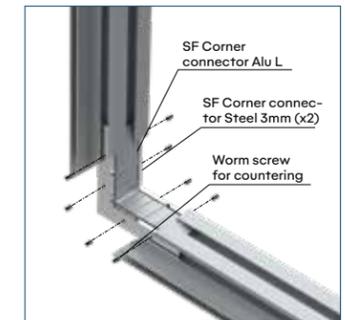

## # matching accessories

**ZR 003** - SF CORNER CONNECTOR ALU L // **ZR 007** - SF CORNER CONNECTOR STEEL M 3mm (x2) // **ZR 008** - CONNECTOR STRAIGHT STEEL (x2) // **ZR 011** - SF STIFFENING PROFILE B // **ZR 012** - LOCK B // **ZR 016** - ACOUSTIC PANEL // **ZR 017** - FOOT S ALU STRAIGHT // **ZR 018** - FOOT M ALU STRAIGHT // **ZR 019** - SF HANGING SET WITHOUT STEEL CABLE // **ZR 020** - STEEL CABLE FOR HANGING SET



SF 23 FRAME

SF 55 DS FRAME


# SL 45 Frame

## Basic information

**Dimensions** 6100 x 45 x 25 mm  
**Weight** 655 g/rmt  
**LED-Modules** BL Power, BL LED 45

## Description

Slim lightbox profile for smaller formats. No reinforcement possible.

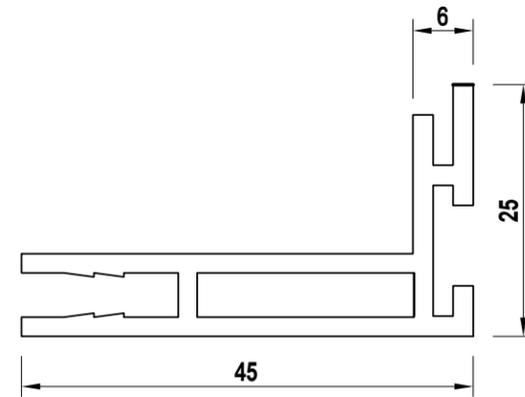


# SL 60 Frame

## Basic information

**Dimensions** 6100 x 60 x 20 mm  
**Weight** 725 g/rmt  
**LED-Modules** BL Power, BL LED 60

## Description


Narrow lightbox profile for small and medium formats (max. 1.5 x 3 m). No reinforcement possible.

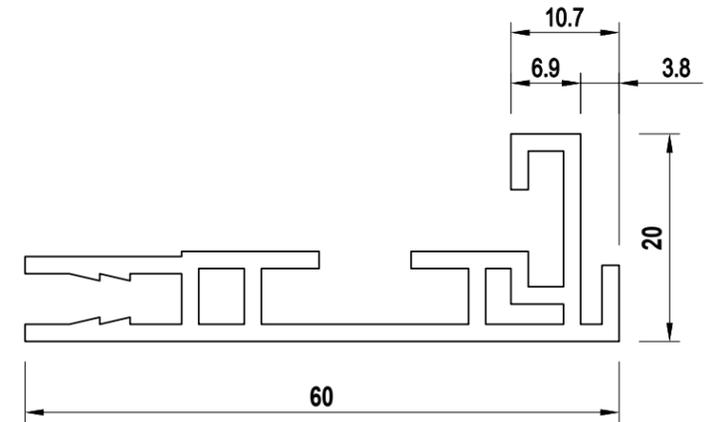


## FEATURES




Lighting possible



Shipping in box




For single sided application

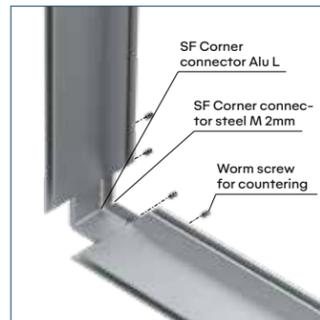


## # matching accessoires

**ZR 003** - SF CORNER CONNECTOR ALU L // **ZR 006** - SF CORNER CONNECTOR STEEL M 2mm // **ZR 008** - CONNECTOR STRAIGHT STEEL // **ZR 016** - ACOUSTIC PANEL

## FEATURES




For single sided application



Shipping in box



Lighting possible

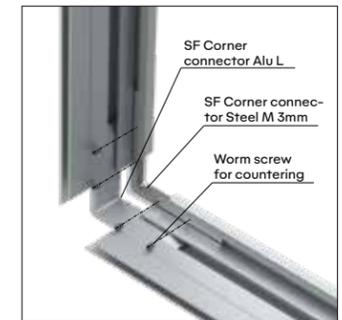

## # matching accessoires

**ZR 003** - SF CORNER CONNECTOR ALU L // **ZR 007** - SF CORNER CONNECTOR STEEL M 3mm // **ZR 008** - CONNECTOR STRAIGHT STEEL // **ZR 016** - ACOUSTIC PANEL


# SL 85 Frame

## Basic information

**Dimensions** 6100 x 85 x 24 mm  
**Weight** 1105 g/rmt  
**LED-Modules** BL Eco, BL LED 85, FL 2020

## Description

Solid profile, also suitable for very large formats. Back panel can be used with aluminum or fabric. Reinforcement possible.

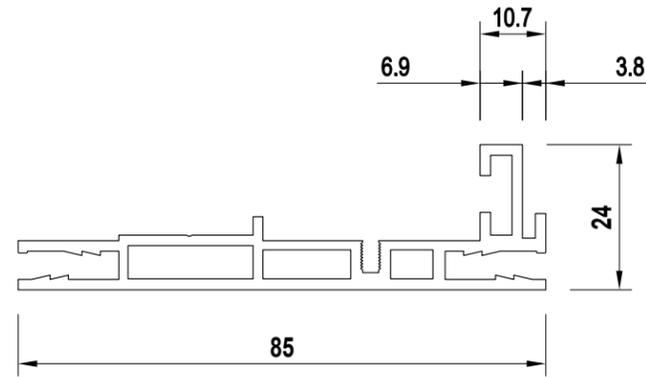


# SL 120 Frame

## Basic information



**Dimensions** 6100 x 120 x 32 mm  
**Weight** 1750 g/rmt  
**LED-Modules** BL Eco, FL 2020

## Description

Solid profile, also suitable for very large formats. Thanks to its special piping pocket, this profile is also suitable for outdoor use. Reinforcement is essential.

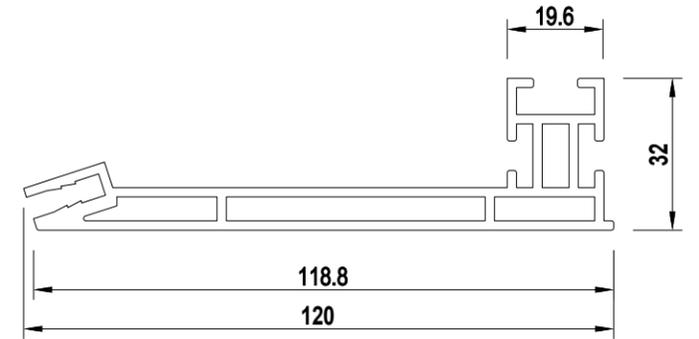




## FEATURES

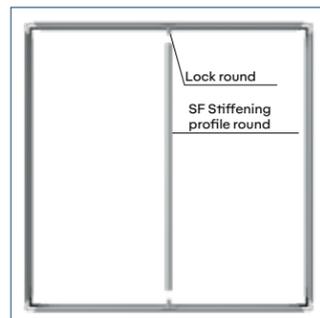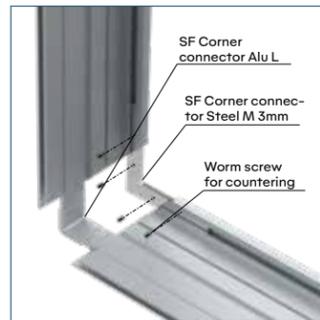

## # matching accessoires

**ZR 003** - SF CORNER CONNECTOR ALU L // **ZR 007** - SF CORNER CONNECTOR STEEL M 3mm // **ZR 008** - CONNECTOR STRAIGHT STEEL // **ZR 013** - SF STIFFENING PROFILE ROUND // **ZR 014** - LOCK ROUND // **ZR 015** - CROSS CONNECTOR

## FEATURES

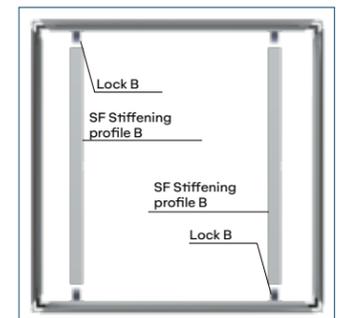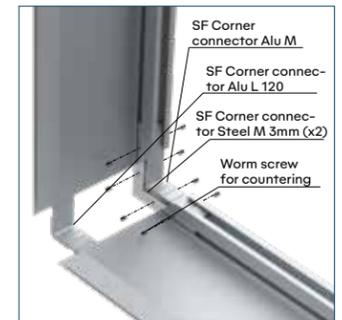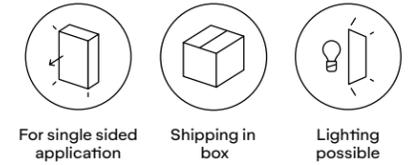

## # matching accessoires

**ZR 002** - SF CORNER CONNECTOR ALU M // **ZR 004** - SF CORNER CONNECTOR ALU L 120 // **ZR 007** - SF CORNER CONNECTOR STEEL M 3mm (x2) // **ZR 008** - CONNECTOR STRAIGHT STEEL // **ZR 011** - SF STIFFENING PROFILE B // **ZR 012** - LOCK B

SL 85 FRAME

SL 120 FRAME


# SL 120 DS Frame

## Basic information


**Dimensions** 6100 x 120 x 19,7 mm  
**Weight** 2090 g/rmt  
**LED-Modules** FL 2020

## Description

Double-sided profile for use as a screen or ceiling hanger. Reinforcement possible.

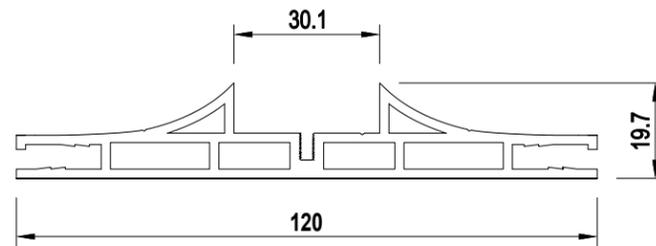


## FEATURES




Lighting possible





Shipping in tube



For double sided application



For single sided application

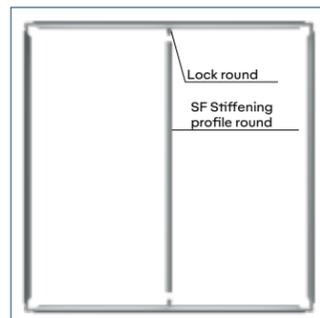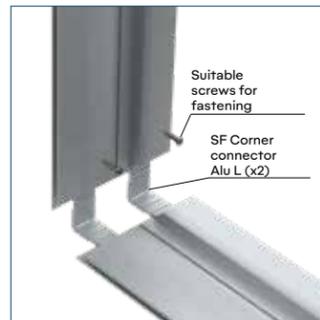


## # matching accessoires

**ZR 003** - SF CORNER CONNECTOR ALU L (x2) // **ZR 013** - SF STIFFENING PROFILE ROUND // **ZR 014** - LOCK ROUND // **ZR 015** - CROSS CONNECTOR // **ZR 017** - FOOT S ALU STRAIGHT // **ZR 018** - FOOT M ALU STRAIGHT // **ZR 019** - SF HANGING SET WITHOUT STEEL CABLE // **ZR 020** - STEEL CABLE FOR HANGING SET


# COLORFUL? WE ARE TOO.


## OUR PROFILES AND FRAMES ARE IN DIFFERENT COLORS AVAILABLE.

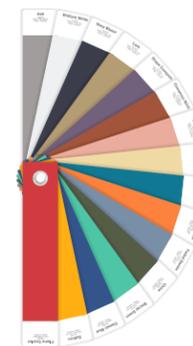


Powder coating possible in RAL colors.

SL 120 DS  
FRAME

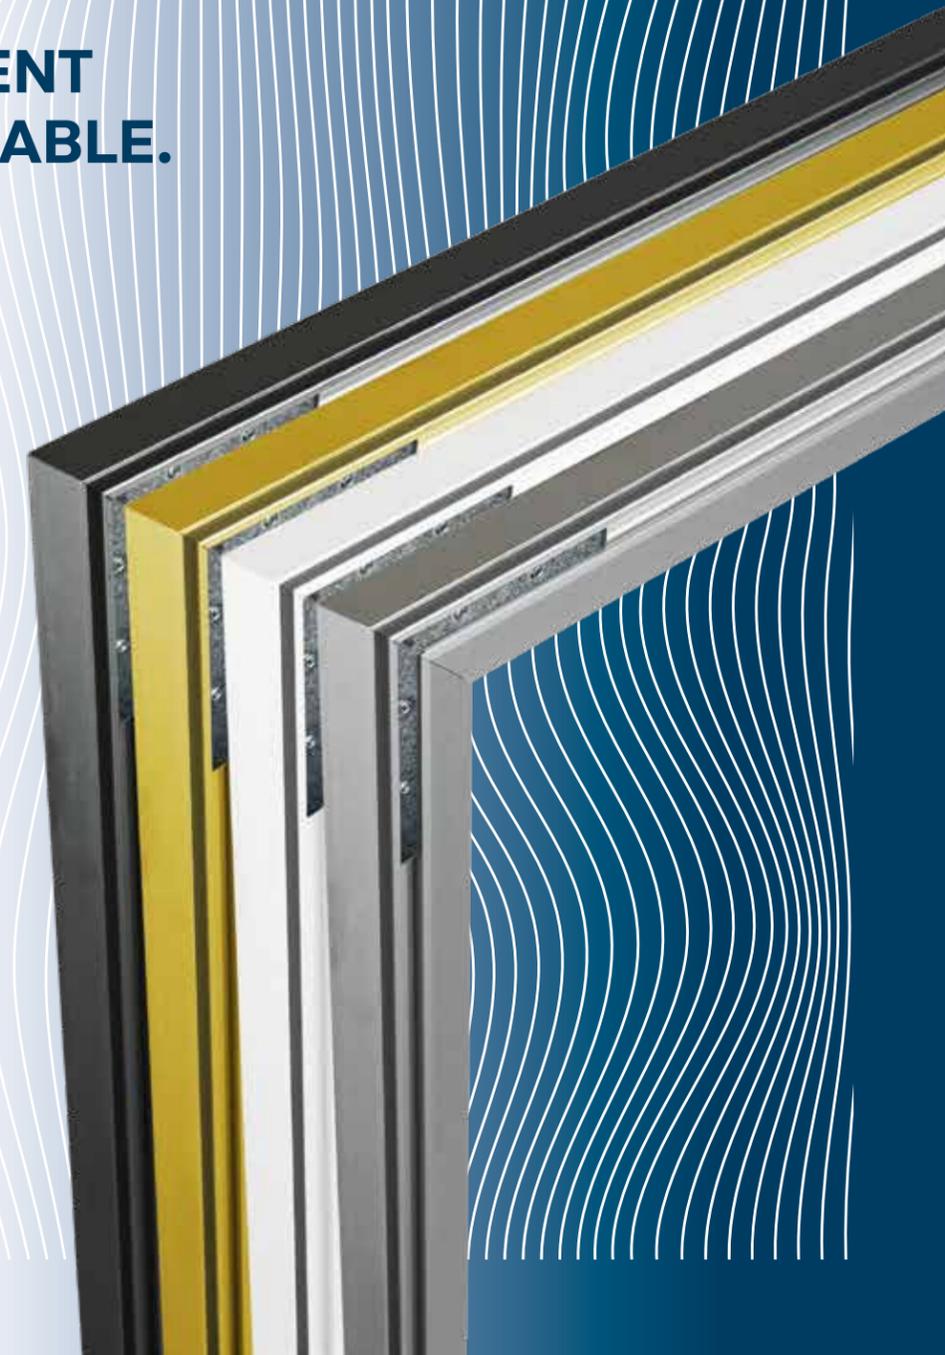

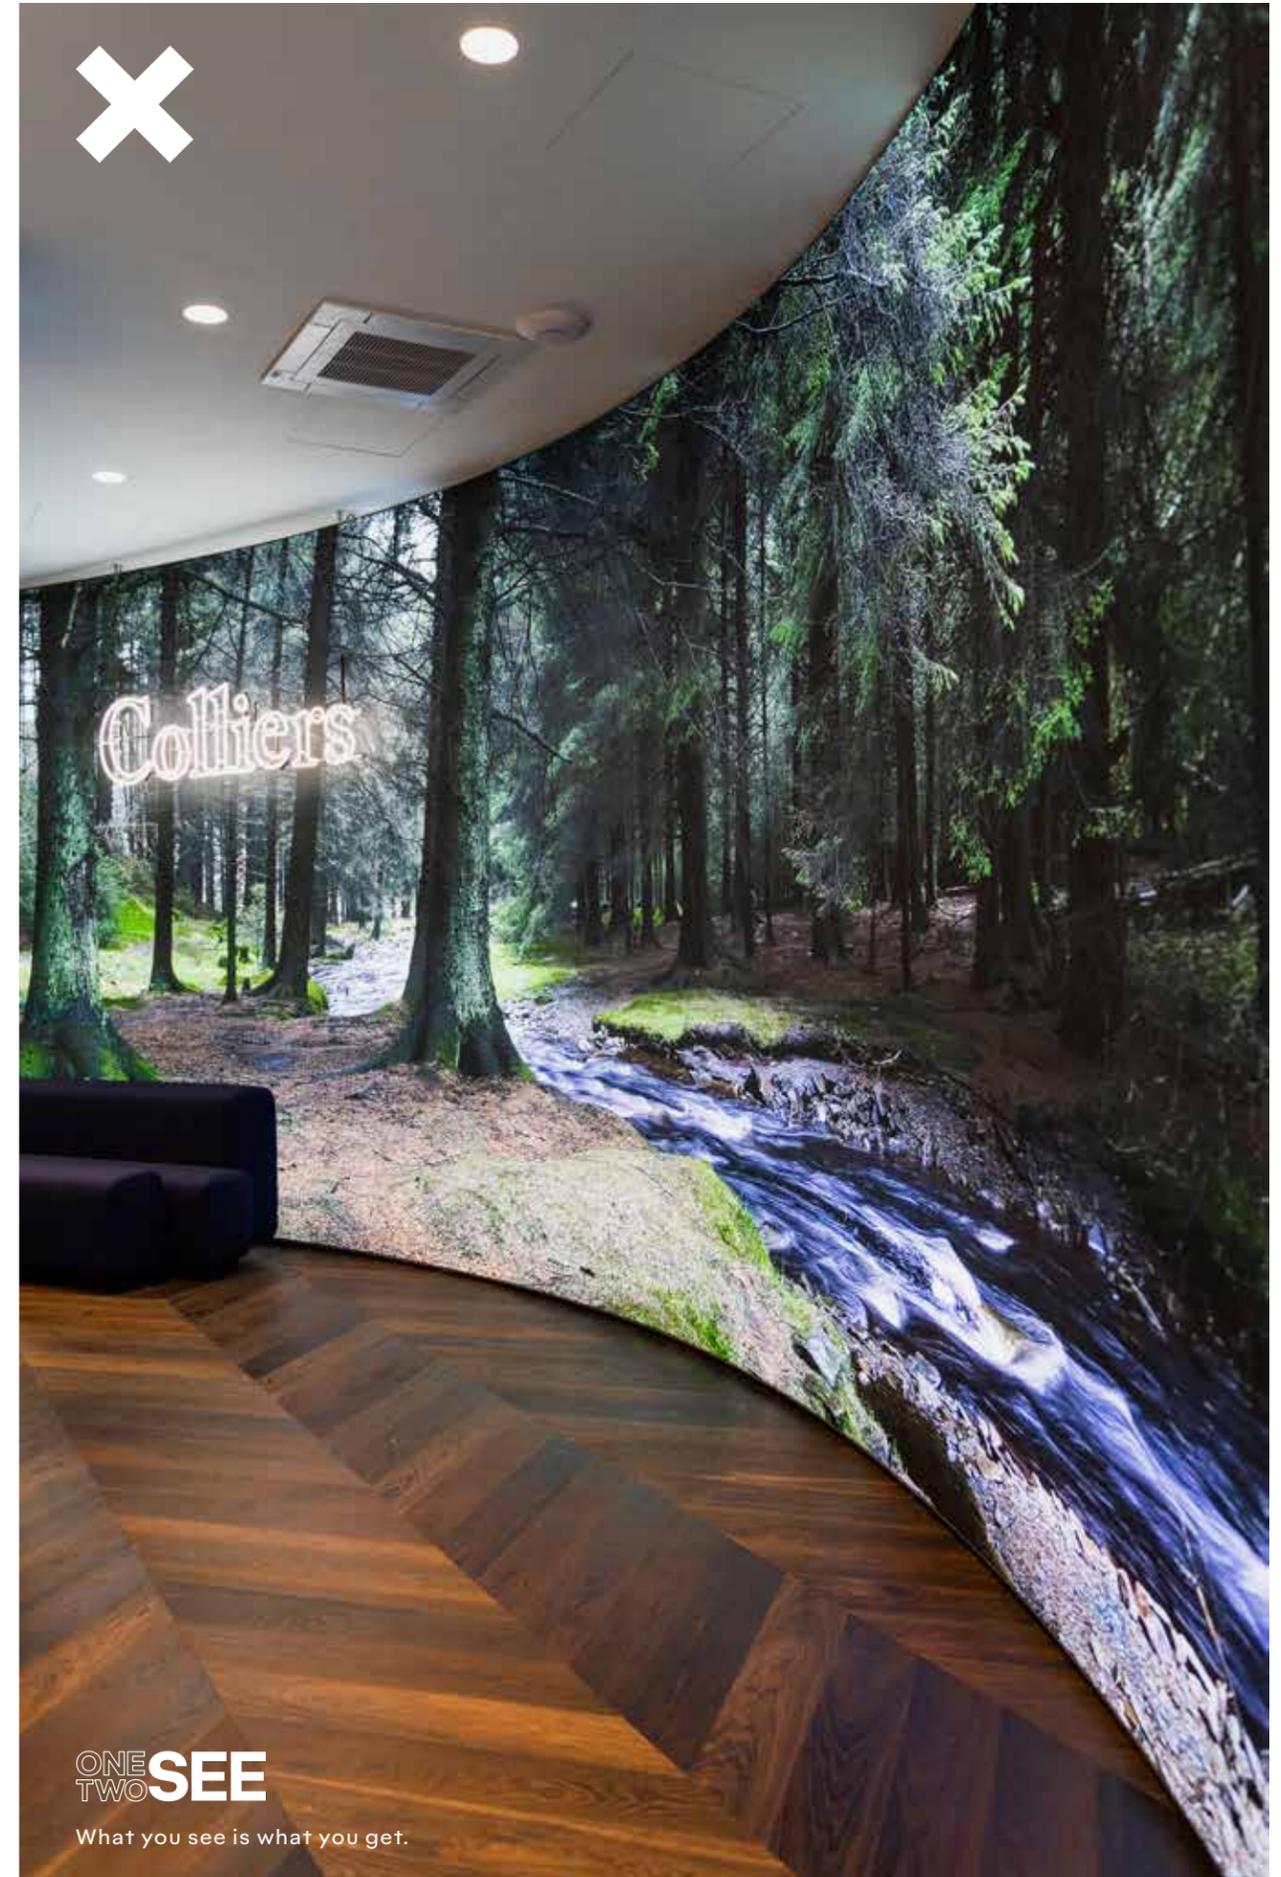

ONE TWO SEE  
What you see is what you get.

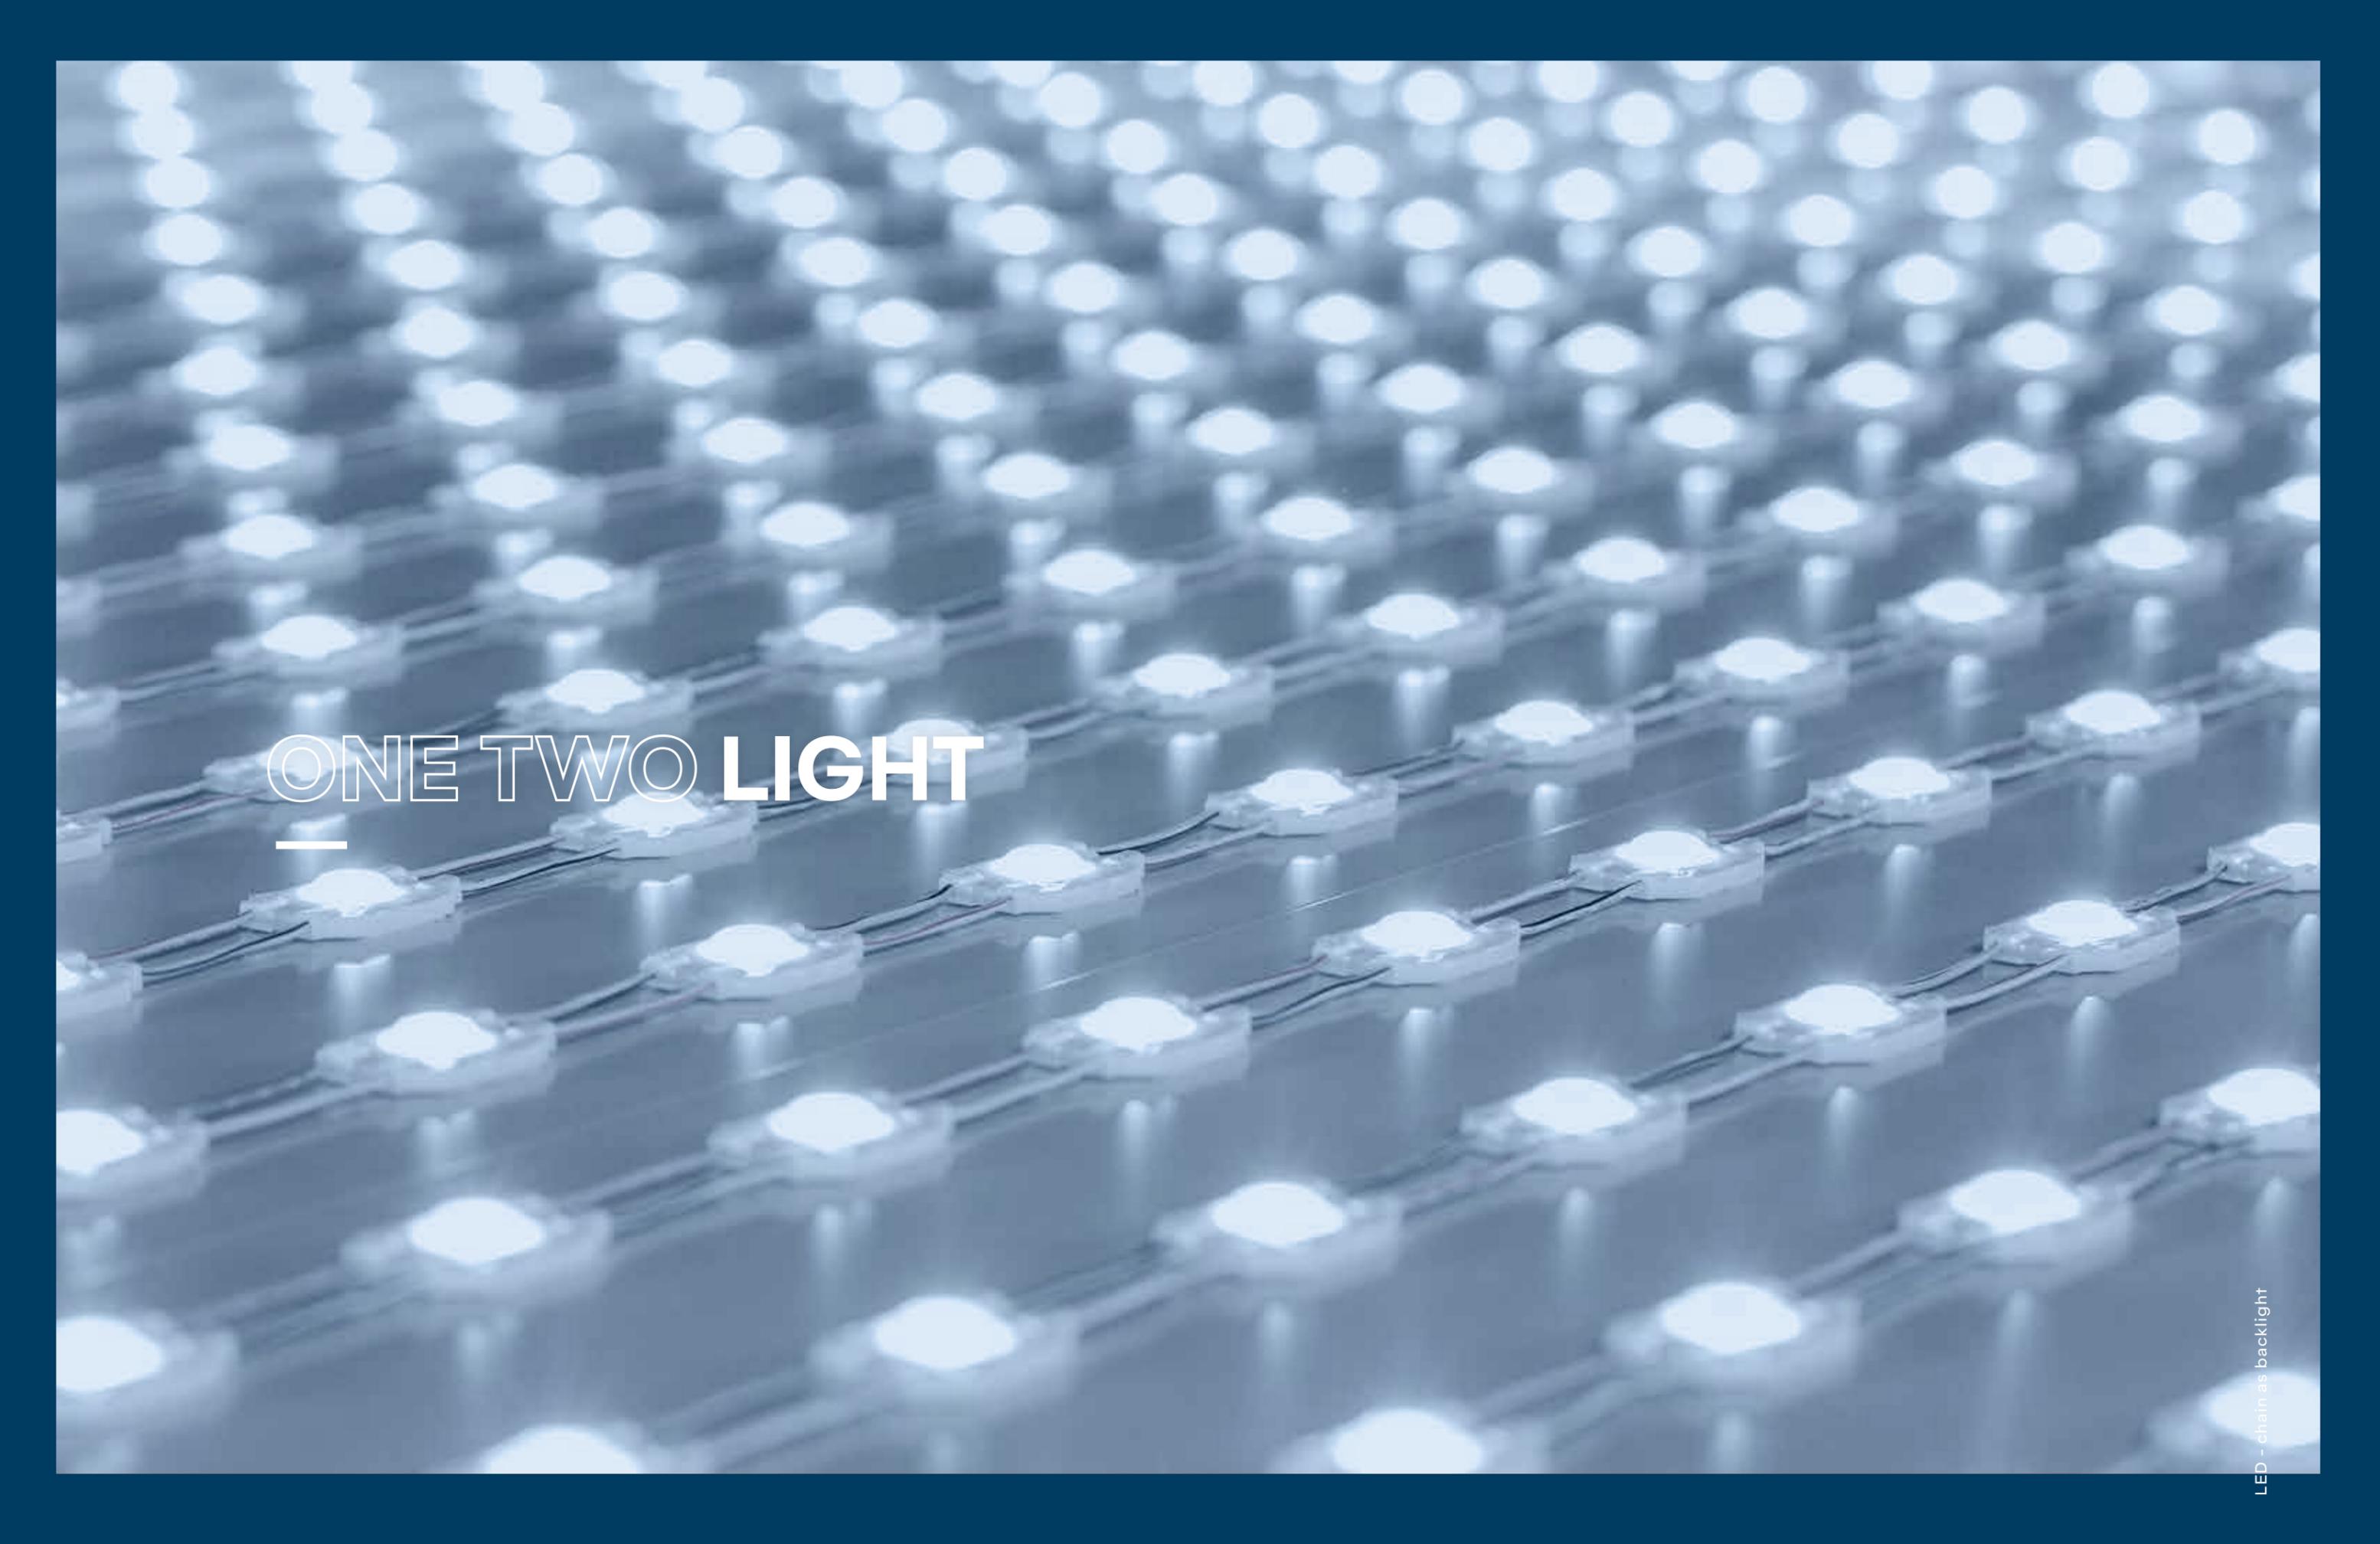

ONE TWO LIGHT


# BL LED 45

## Basic information

LED type	SMD 2835
Beam angle	170°
Dimmable	yes
Color temperature	approx. 6500 k
Candela	2070 cd/m <sup>2</sup>
Power per LED point	1 W
Power per m <sup>2</sup>	108 W
Voltage	DC 24 V
Number of LED points	approx. 108 LED/m <sup>2</sup>

## Eco-Version

Candela	1960 cd/m <sup>2</sup>
Power per m <sup>2</sup>	96 W
Number of LED points	approx. 96 LED/m <sup>2</sup>

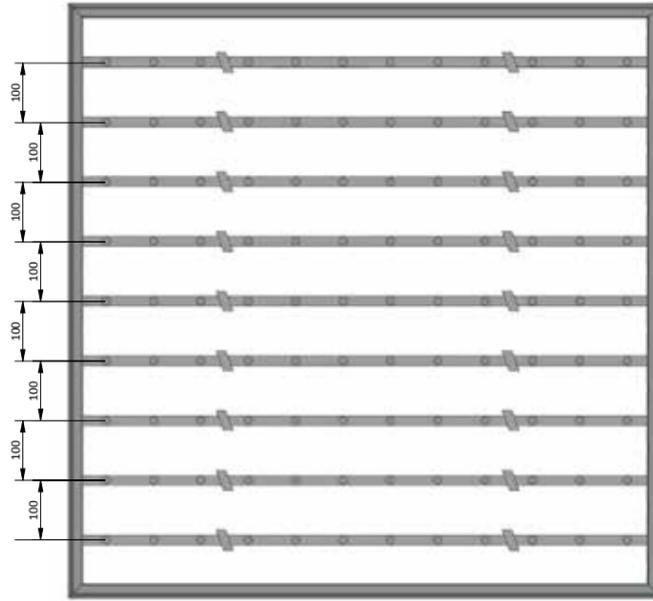


# BL LED 60

## Basic information

LED type	SMD 2835
Beam angle	170°
Dimmable	yes
Color temperature	approx. 6500 k
Candela	1380 cd/m <sup>2</sup>
Power per LED point	1 W
Power per m <sup>2</sup>	60 W
Voltage	DC 24 V
Number of LED points	approx. 60 LED/m <sup>2</sup>

## Eco-Version

Candela	1030 cd/m <sup>2</sup>
Power per m <sup>2</sup>	48 W
Number of LED points	approx. 48 LED/m <sup>2</sup>

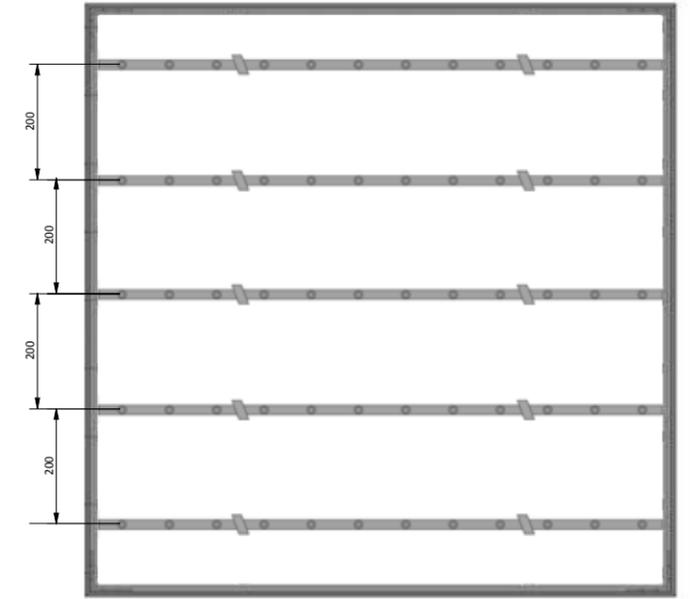

S U I T A B L E  
F R A M E S Y S T E M S




SL 45




## # Example of use

BL LED 45 installed in SL 45 frame system, incl. back panel.  
**ATTENTION:** Only for indoor use; Transformer only possible outside the frame!



Shipping in box




Full-surface Backlighting

S U I T A B L E  
F R A M E S Y S T E M S




SL 60

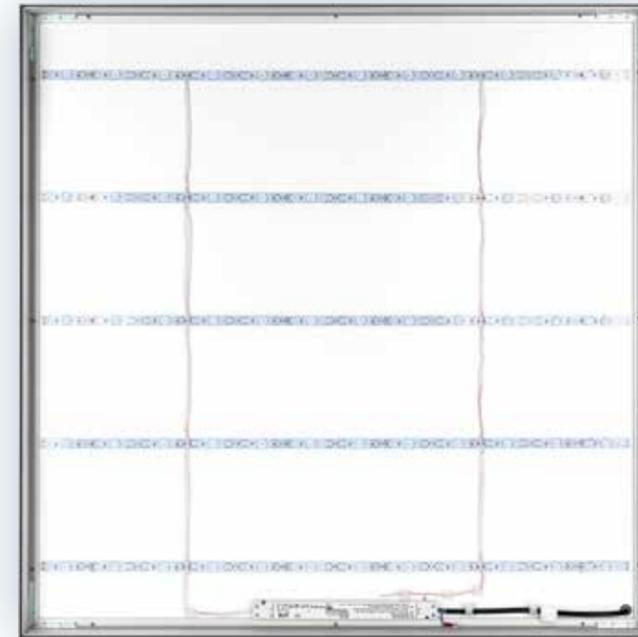


## # Example of use

BL LED 60 installed in SL 60 frame system, incl. back panel.  
**ATTENTION:** For indoor use only!



Full-surface Backlighting



Shipping in box

LED  
BL 45

LED  
BL 60


## BL LED 85

### Basic information

LED type	SMD 2835
Beam angle	170°
Dimmable	yes
Color temperature	approx. 6500 k
Candela	932 cd/m <sup>2</sup>
Power per LED point	1 W
Power per m <sup>2</sup>	48 W
Voltage	DC 24 V
Number of LED points	approx. 48 LED/m <sup>2</sup>

### Eco-Version

Candela	728 cd/m <sup>2</sup>
Power per m <sup>2</sup>	36 W
Number of LED points	approx. 36 LED/m <sup>2</sup>

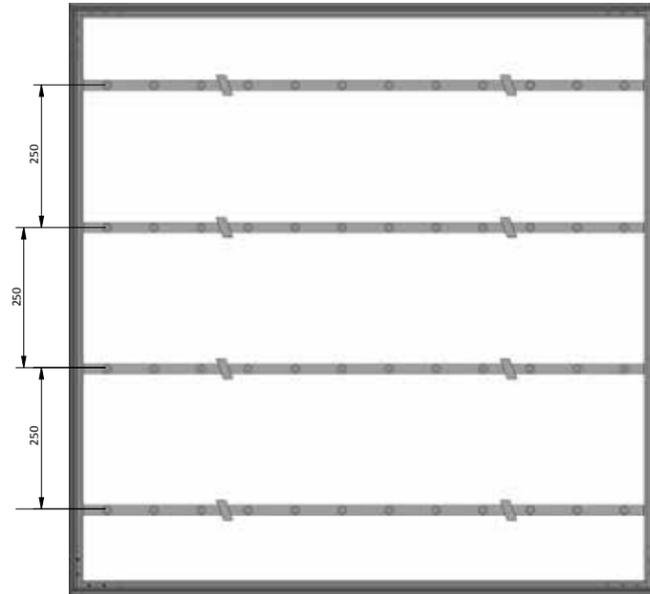


## BL LED 120

### Basic information

LED type	SMD 2835
Beam angle	170°
Dimmable	yes
Color temperature	approx. 6500 k
Candela	645 cd/m <sup>2</sup>
Power per LED point	1 W
Power per m <sup>2</sup>	36 W
Voltage	DC 24 V
Number of LED points	approx. 36 LED/m <sup>2</sup>

### Eco-Version


Candela	450 cd/m <sup>2</sup>
Power per m <sup>2</sup>	24 W
Number of LED points	approx. 24 LED/m <sup>2</sup>

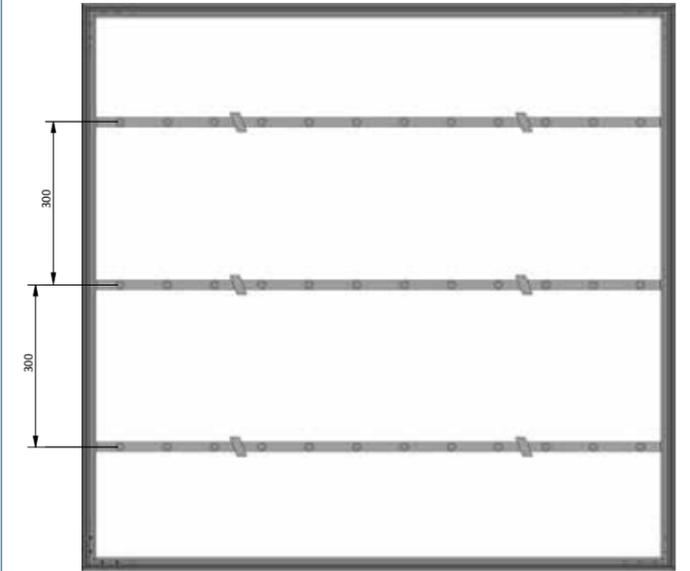

S U I T A B L E  
F R A M E S Y S T E M S




SL 85

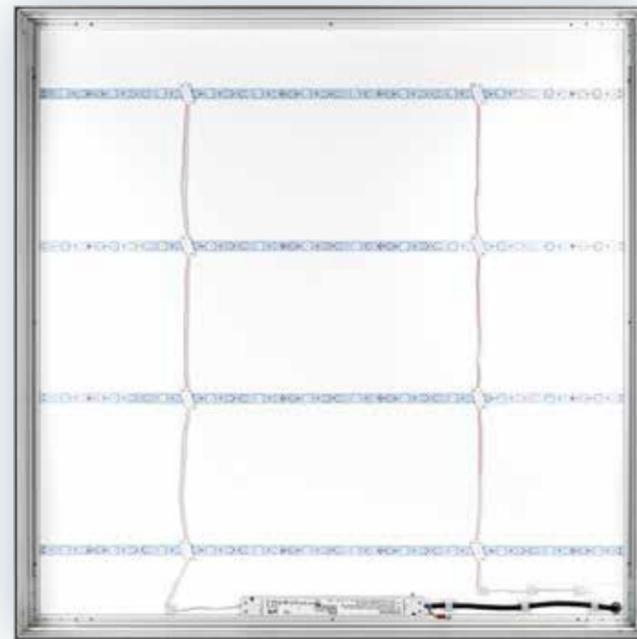


### # Example of use

BL LED 85 installed in SL 85 frame system, incl. rear panel.  
**ATTENTION:** For indoor use only!



Shipping in box



Full-surface Backlighting

S U I T A B L E  
F R A M E S Y S T E M S




SL 120



### # Example of use

BL LED 120 installed in SL 120 frame system, incl. rear panel.  
**ATTENTION:** For indoor use only!



Full-surface Backlighting



Shipping in box

LED  
L  
B  
B

LED  
120  
B

# FL NEO

## Basic information


LED type	OSRAM LED 3030
Beam angle	10° x 36°
Dimmable	yes
Color temperature	approx. 6500 k
Candela	600 cd/m <sup>2</sup>
Power per LED point	2 W
Power per rmt	32 W
Luminous flux with optics	approx. 3040 Luminous/rmt
Number of LED points	4 or 16 per module

## Modul 4

Format	240 x 26 mm
Power	8 W
Voltage	DC 24 V

## Modul 16

Format	960 x 26 mm
Power	32 W
Voltage	DC 24 V

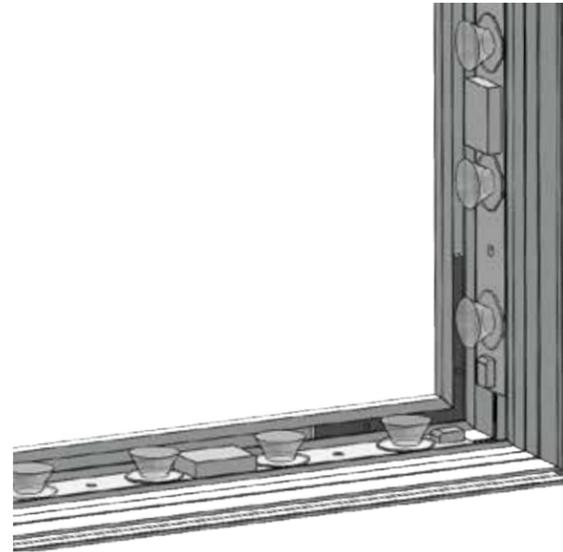

## S U I T A B L E F R A M E S Y S T E M S




SL 85



SL 120



SL 120 DS

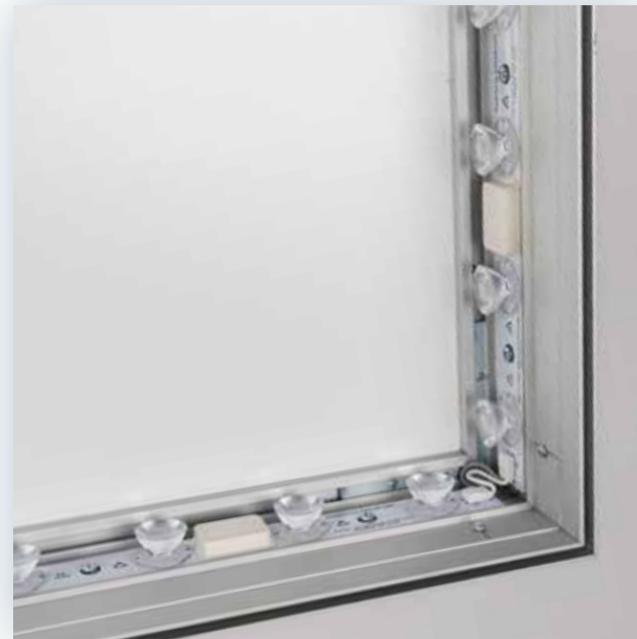

## # Example of use


FL NEO installed in SL 85 frame system, incl. rear panel. The modules consist of one printed circuit board each, which is equipped with 4 or 16 LEDs with mounted optics. **ATTENTION:** Only for indoor application!




Side lighting



Shipping in tube



Shipping in box

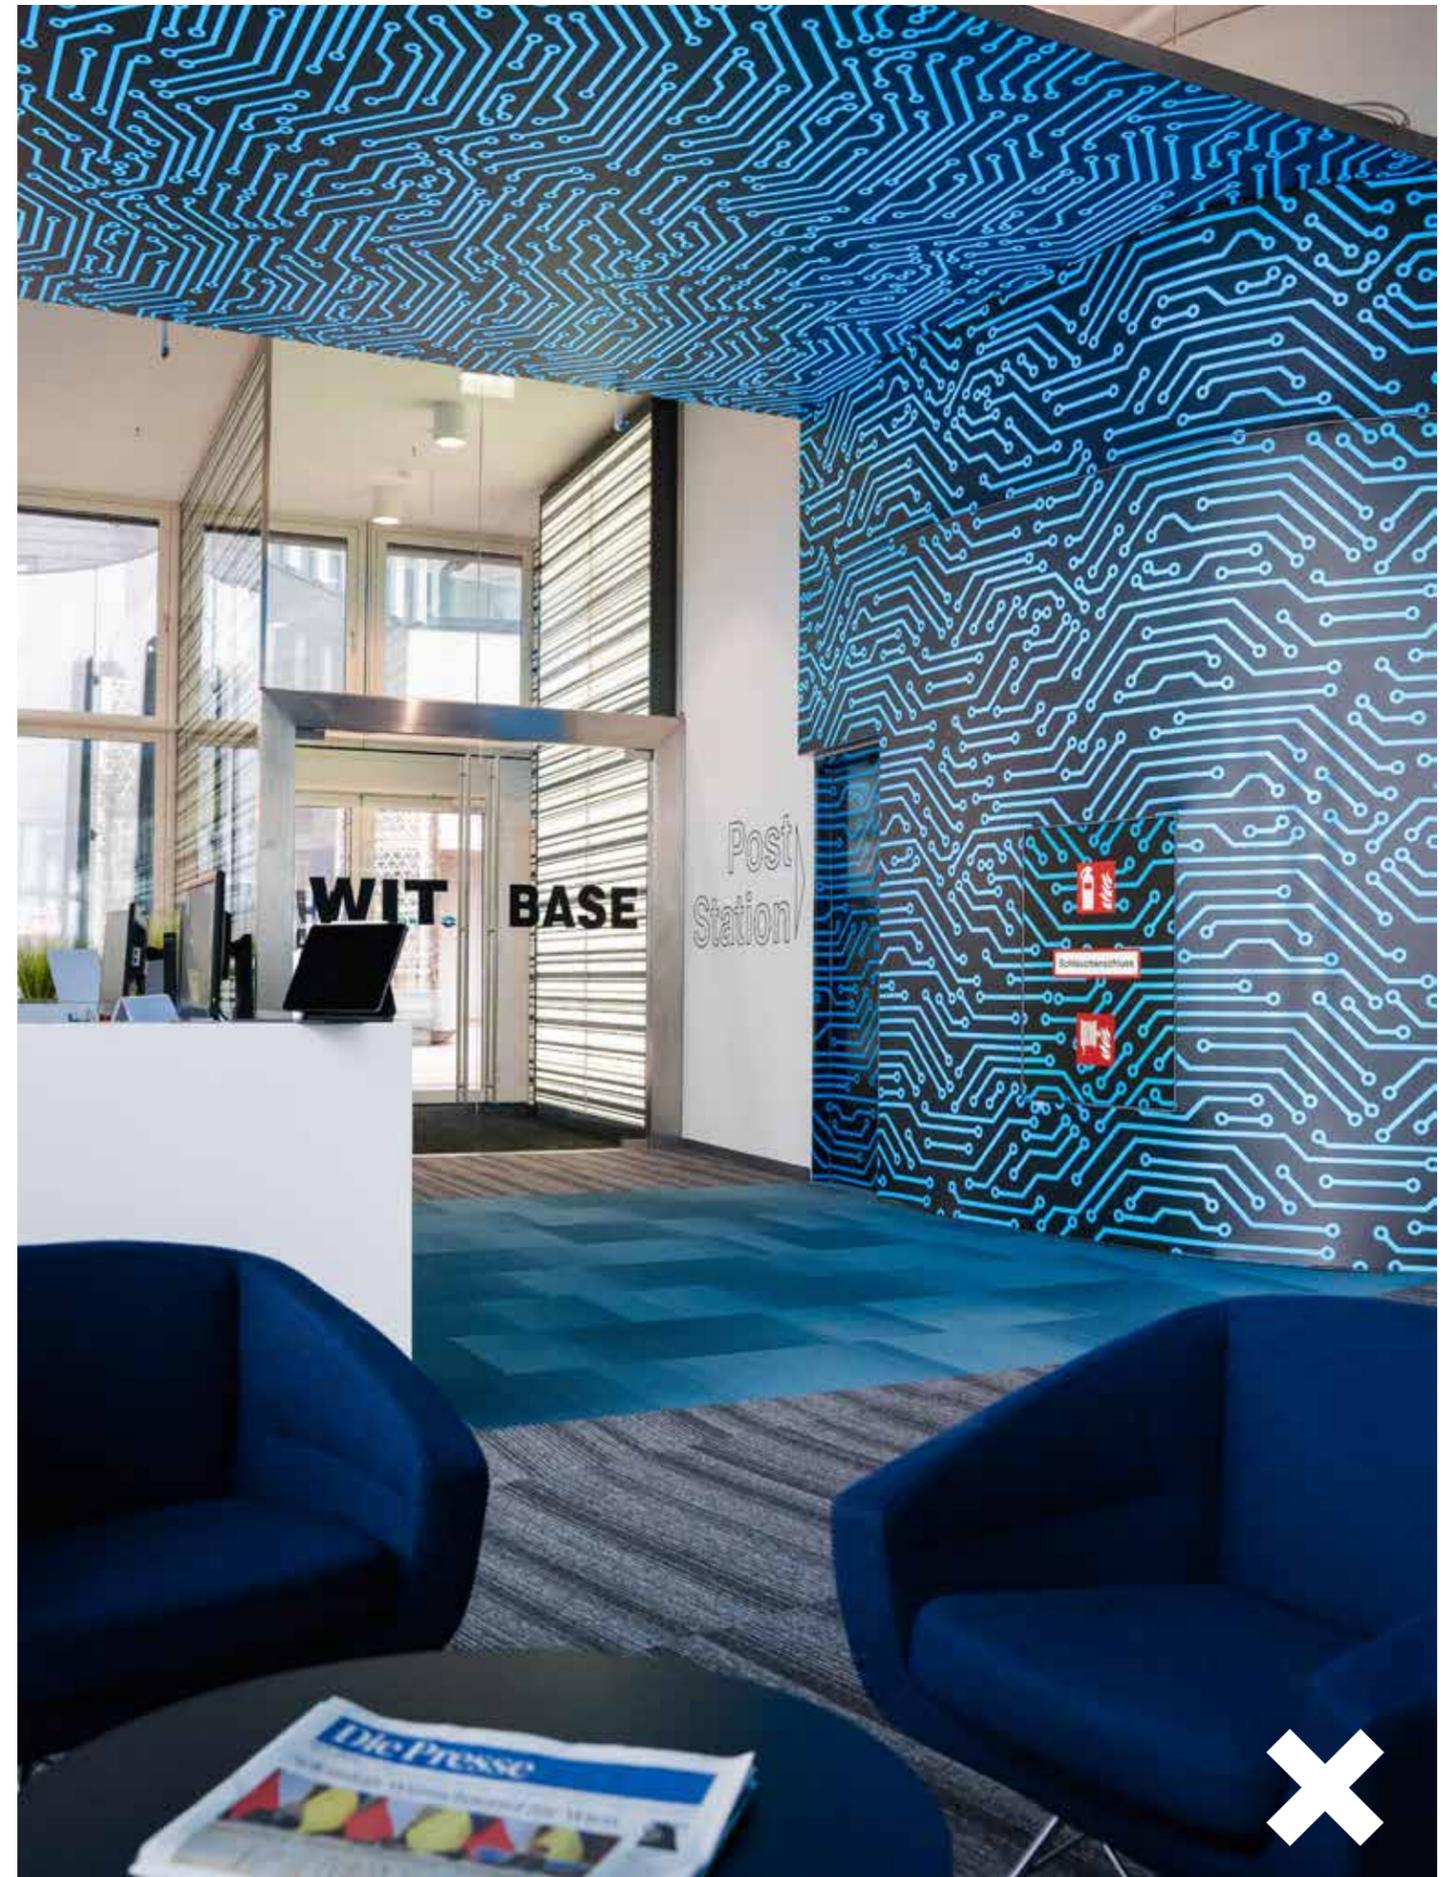

# Frame systems accessories



**SF Corner Connector Alu S**  
Material thickness 5,1 mm  
60 x 60 x 11 mm, fits SF 23

ZR 001



**SF Corner Connector Alu M**  
Material thickness 5,1 mm  
60 x 60 x 16 mm, fits SL 120

ZR 002



**SF Corner Connector Alu L**  
Material thickness 5,1 mm  
60 x 60 x 20 mm, fits SF 55 DS, SL 45, SL 60, SL 85, SL 120 DS

ZR 003



**SF Corner Connector Alu L 120**  
Material thickness 4,6 mm  
60 x 60 x 19,5 mm, fits SL 120

ZR 004



**SF Stiffening Profile Round**  
White, fits SL 85, SL 120 DS

ZR 013



**Lock Round**  
Fits Stiffening profile round, fits SL 85, SL 120 DS

ZR 014



**Cross Connector**  
For stiffening profile round with additional, horizontal stiffening, fits SL 85, SL 120 DS

ZR 015



**Acoustic Panel**  
Sound absorbing panel that can be installed in frames, fits SF 55 DS, SL 45, SL 60

ZR 016



**SF Corner Connector Steel S**  
Material thickness 2 mm  
60 x 60 x 10 mm, fits SF 17

ZR 005



**SF Corner Connector Steel M 2mm**  
Material thickness 2 mm  
75 x 75 x 12,5 mm, fits SL 45

ZR 006



**SF Corner Connector Steel M 3mm**  
Material thickness 3 mm  
75 x 75 x 12,5 mm, fits SF 23, SF 55 DS, SL 60, SL 85, SL 120

ZR 007



**Connector Straight Steel**  
Material thickness 2 mm  
100 x 12,5 mm, fits SF 23, SF 55 DS, SL 45, SL 60, SL 85, SL 120

ZR 008



**Foot S Alu Straight**  
Material thickness 8 mm  
400 x 80 mm, fits SF 55 DS, SL 120 DS

ZR 017



**Foot M Alu Straight**  
Material thickness 8 mm  
600 x 80 mm, fits SF 55 DS, SL 120 DS

ZR 018



**SF Hanging Set without Steel Cable**  
2-piece (1 pc. wall + 1 pc. profile), fits SF 55 DS, SL 120 DS

ZR 019



**Steel Cable for Hanging Set**  
Material thickness 1,5 mm  
fits SF 55 DS, SL 120 DS

ZR 020



**SF Stiffening Profile A**  
16 x 40 mm, fits SF 23

ZR 009



**Lock A**  
Fits Stiffening profile A, fits SF 23

ZR 010



**SF Stiffening Profile B**  
19 x 45 mm, fits SF 55 DS, SL 120

ZR 011



**Lock B**  
Fits Stiffening profile B, fits SF 55 DS, SL 120

ZR 012



**Roller for Rubber Welt Flat**  
Allows easy mounting of pictures with flat rubber welt

ZR 021



**Roller for Rubber Welt Round**  
Allows easy mounting of pictures with round rubber welt

ZR 022




**Rubber Welt Round**  
Alternative welt for pictures without sewn flat welt

ZR 023



**Mounting Gloves "Light and Frame"**  
Special gloves for welt mounting, fast, easy & stain resistant.

ZR 024

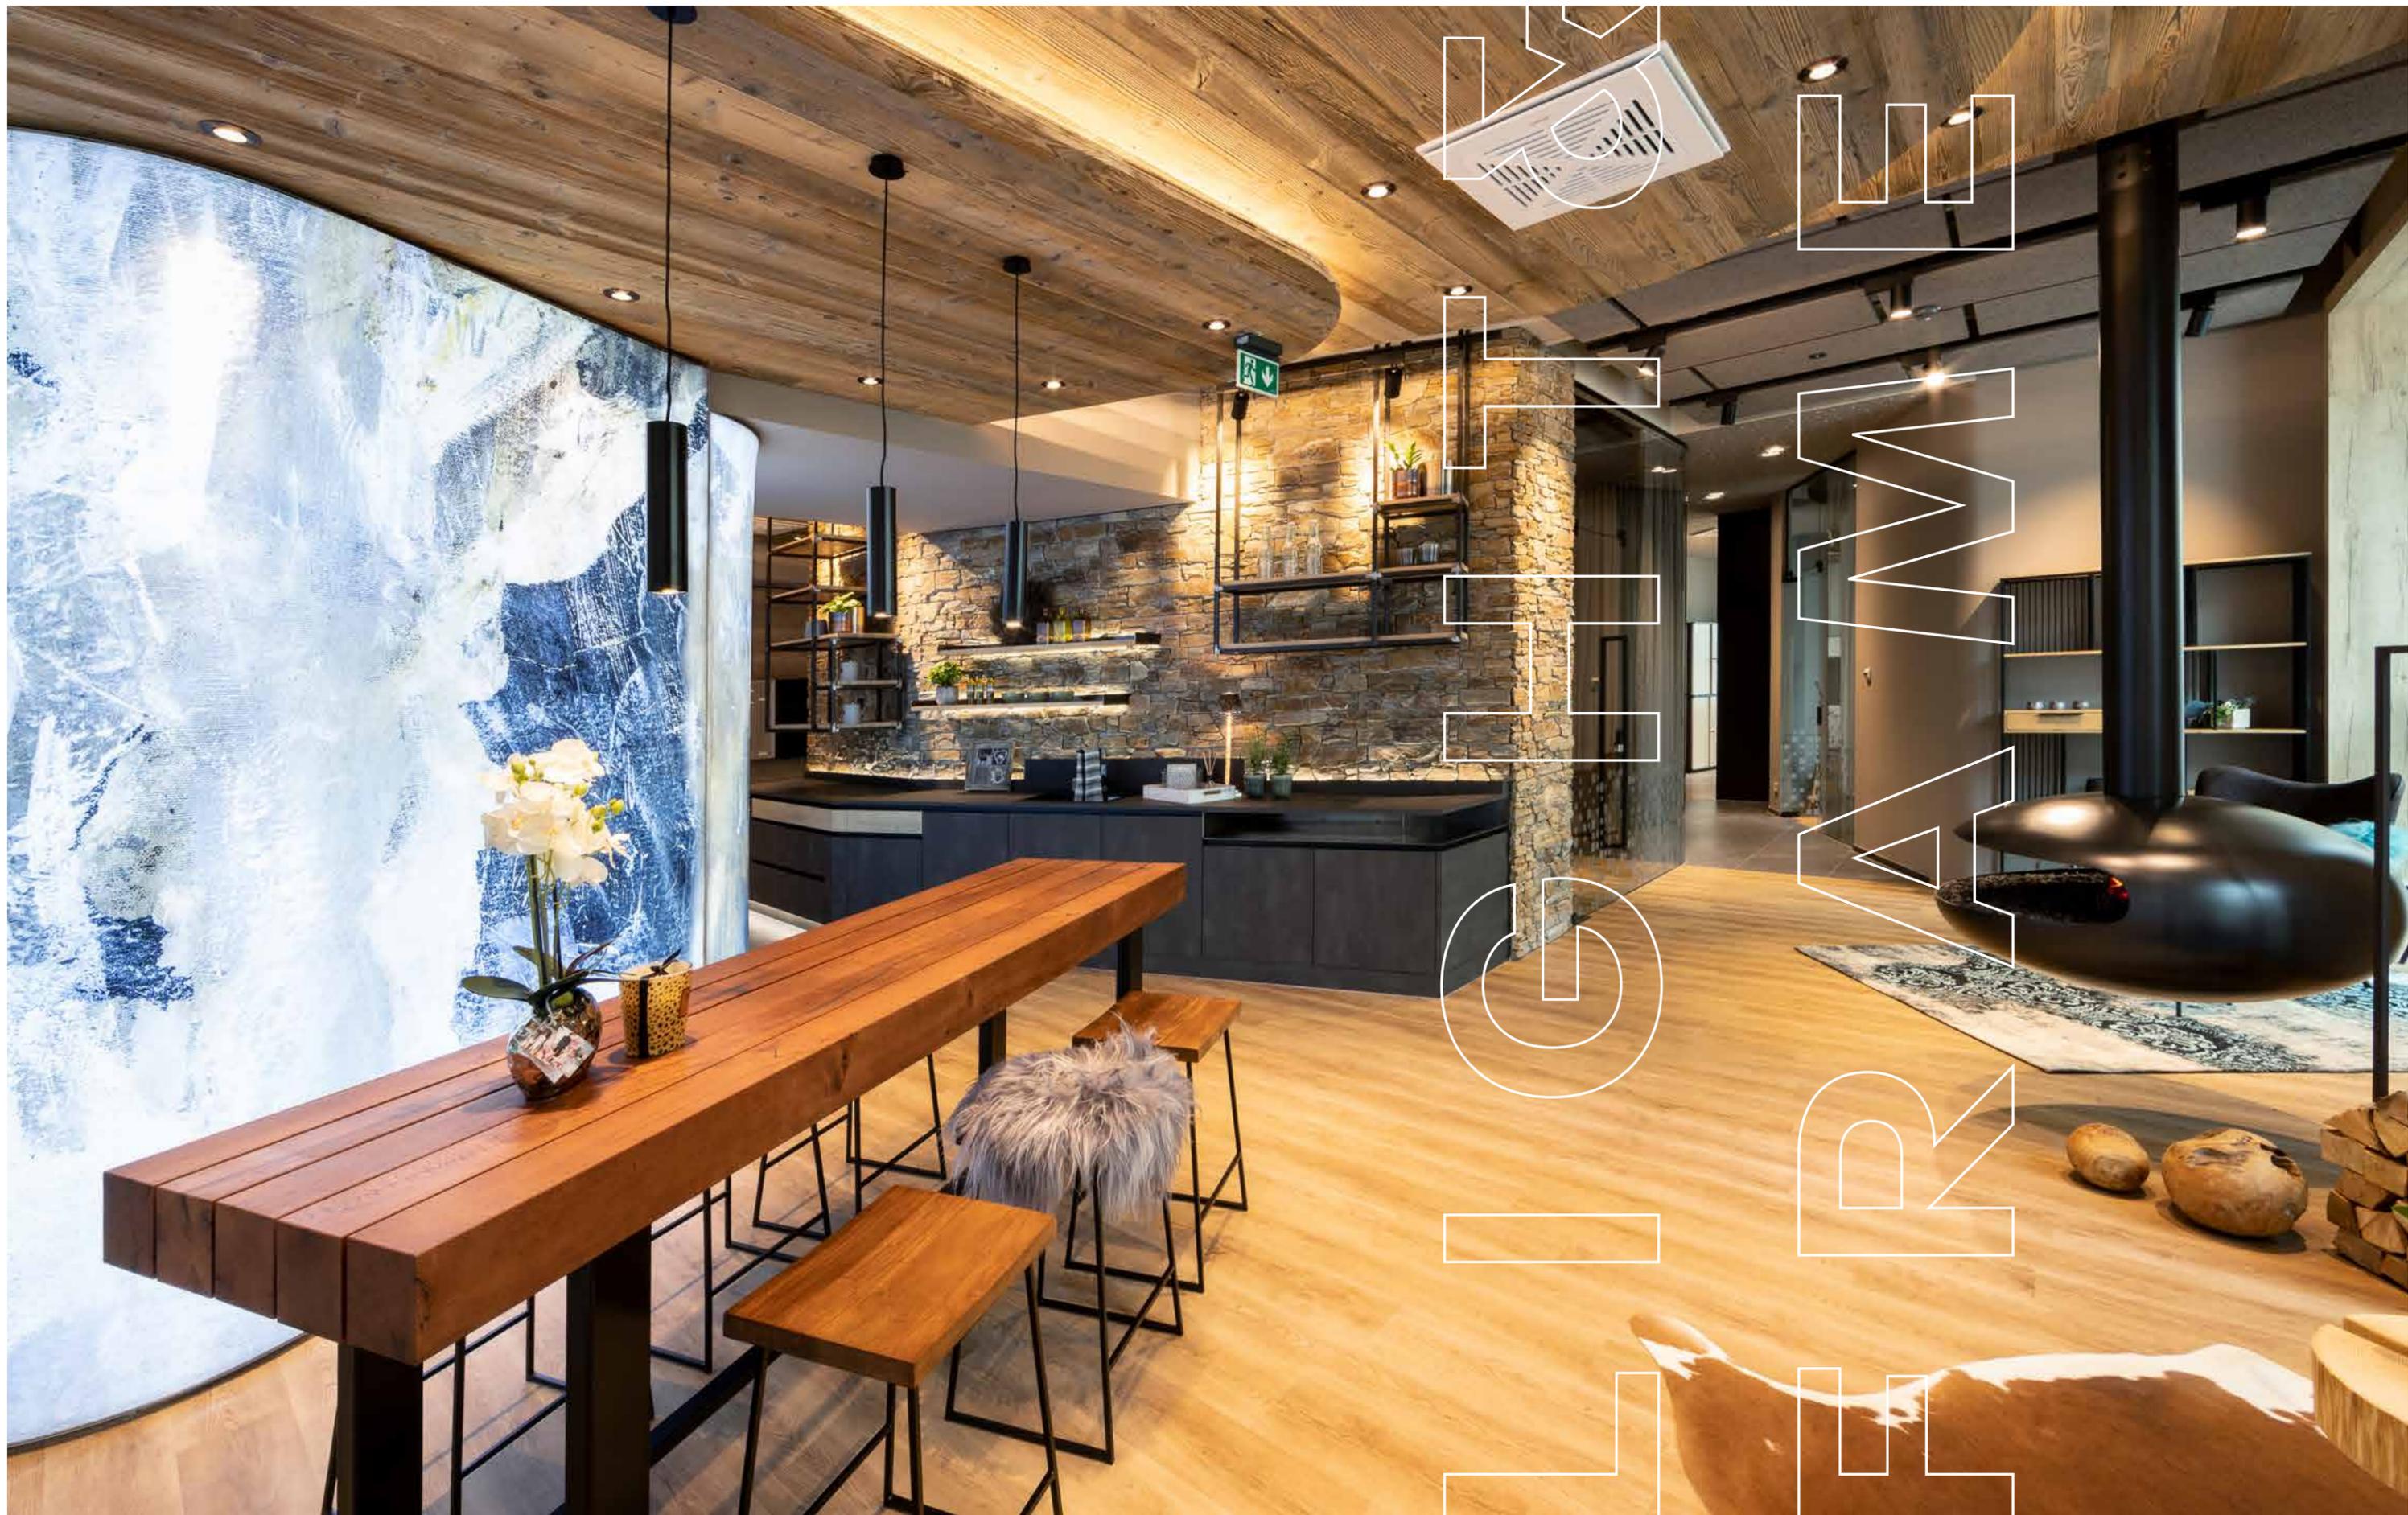

NOTES?  
FEEL FREE

TREVISION

TREVISION

TREVISION

TREVISION

# TALK TO US

**TREVISION Groß.Bild.Technik GmbH**  
**Industriestraße 1**  
**7051 Großhöflein, Austria**

**T +43 2682 76060-0**  
**E [info@trevision.at](mailto:info@trevision.at)**  
**G [www.trevision.at](http://www.trevision.at)**

